

AF 103

Self Contained Ice Machine up to 108 kg

Item #:
Project:
Quantity:



FEATURES

- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Clean alert: advises with a blink when it's time to clean the filter.
- Electronic control: ambient and water temperatures may change throughout the years but your ice maker will stay the same.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Water in / ice out concept (no cycles, zero water wastage): limits to almost zero excess energy, water and time wastage.
- Ergonomic access to ice with sliding disappearing door: one-touch door lift, makes barman's life significantly easier.
- Built-in storage bin: allows most undercounter installations for easier fit-in solutions.



AF 103
Flake ice
Residual water content 25%

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

30 kg

REFRIGERANT GAS

R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230/50/1
230/60/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com




Self Contained Ice Machine up to 108 kg

AF 103


Self Contained Ice Machine up to 108 kg

Item #:
Project:
Quantity:


Self Contained Ice Machine up to 108 kg

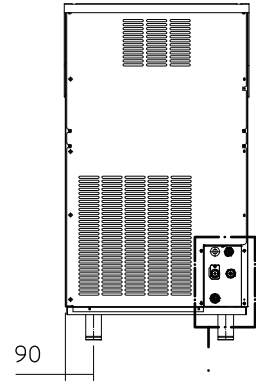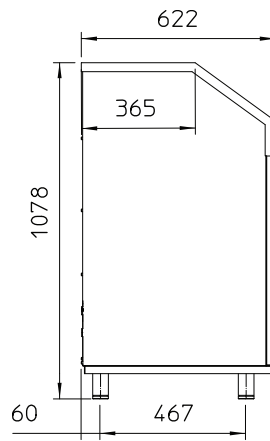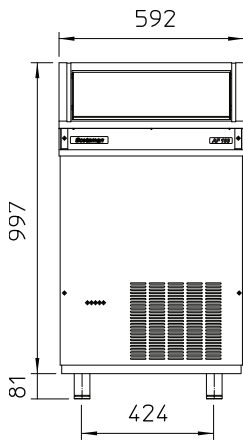

AIR FLOW



- UNIT OF MEASUREMENT: mm
1. 13/16" OD - OVERFLOW DRAIN
 2. 3/4" GAS - WATER INLET
 3. 3/4" GAS - WATER OUTLET WATER COOLED UNIT ONLY
 4. 3/4" GAS - WATER INLET WATER COOLED UNIT ONLY
 5. CORD SET

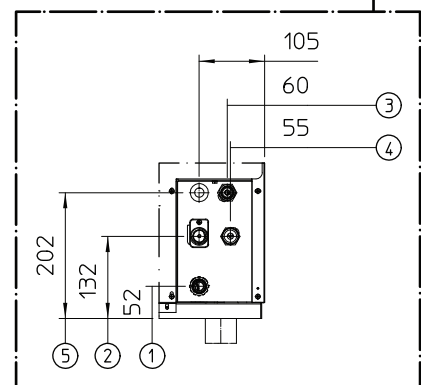

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	592 x 622 x 1078 mm		AF 103 AS	230/50/1	3071	900	3	1.5	10
Net weight	68 kg		AF 103 WS	230/50/1	3071	900	3	1.5	10
SHIPPING DATA			AF 103 AS	230/60/1	2730	800	3	1.5	10
			AF 103 WS	230/60/1	2730	800	3	1.5	10
Carton (W x D x H)	670 x 690 x 1180 mm								
Weight	76 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AF 103 AS	Air	230/50/1	105	102	80	11.2	9.0	3.3	400
AF 103 WS	Water	230/50/1	108	106	89	9.2	8.2	32.1	350
AF 103 AS	Air	230/60/1	105	102	80	10.6	8.5	31.3	350
AF 103 WS	Water	230/60/1	105	102	80	11.9	9.5	3.7	450

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions