

EC 46 EASY FIT

Self Contained Ice Machine up to 25 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch.
- Routine Maintenance visible alarm light on front panel.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC M 46
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

9 kg

REFRIGERANT GAS

R134a

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230/50/1
230/60/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine up to 25 kg

EC 46 EASY FIT

Self Contained Ice Machine up to 25 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 25 kg

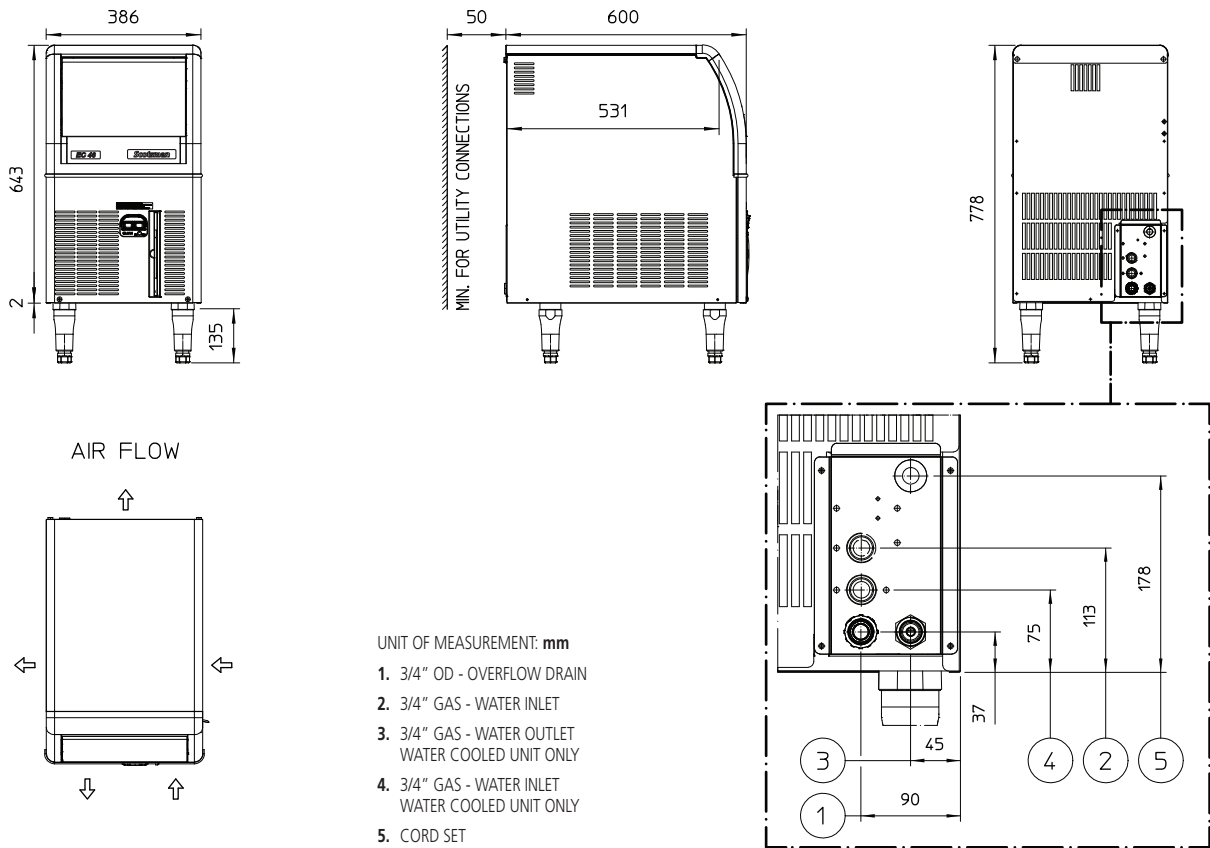

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	386 x 600 x 645 mm		EC M 46 AS	230/50/1	2730	800	3	1.5	10
Net weight	37 kg		EC M 46 WS	230/50/1	2730	800	3	1.5	10
			EC M 46 AS	230/60/1	3071	900	3	1.5	10
SHIPPING DATA									
Carton (W x D x H)	460 x 670 x 760 mm								
Weight	44 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EC M 46 AS	Air	230/50/1	25	23	19	40.8	8.0	3.2	350
EC M 46 WS	Water	230/50/1	25	23	21	31.0	6.5	27.3	350
EC M 46 AS	Air	230/60/1	25	24	20	42.3	8.3	3.4	450

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions